




•OPTIONAL: BBT-500 Tube Holder

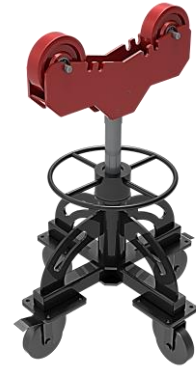

Standard Features

- Capability of 360 degree Worktable rotation.
- Adjustable Height by Manual lift
- Adjustable worktable rotation speed
- Rotational Speed Dijital display on Electrical Cabinet
- 5 mt.Handbox Cable Remote Control
- 5 mt.Power Cable
- Brake & Fan Cooled Motor (Asynchronous)
- Standard Machine Colors:
 - Chassis RAL 7011(Grey)
 - Sheet Covers:RAL 3020(Red)
- Power supply :380V - (3 phase+Neutral+Earthing)
- Welding Earthing Group
- One (1) Year Warranty (wearing parts out of warranty)

Optional Control Units

DFPSE

Double Foot Pedal+Stick+
Emergency Stop (3 m)



OHC

Overhead Hangable Control




WRC

Wireless Remote Control



❖ All technical specifications are subject to change without prior notice.

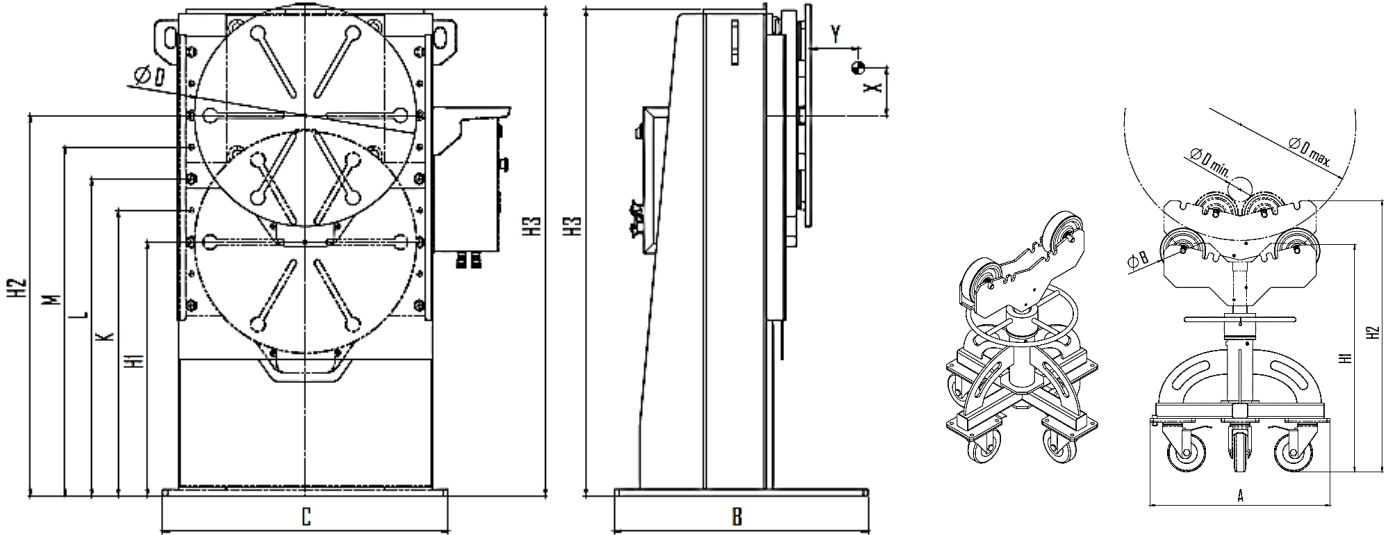

Technical Details :

Model No : BTP	Symb	Unit	BTP1,5-2AX
Capacity		kg	1 500
Rotation Speed		mm/min	0,15 - 1,3
Max. Rotational Torque		Nm	2290
Max. Axial Run-Out	X - Y	Nm	150 - 300
Max. Welding Current		Amp	700
Table Plate Diameter	ØD		700
Height Min. (1st Level) - Max (5th Level)	(H1- H2)	mm	800 - 1200
Rotator Frame Height 2nd Level	K	Mm	900
Rotator Frame Height 3rd Level	L	Mm	1000
Rotator Frame Height 4th Level	M	mm	1100
Length	C	mm	900
Width	B	mm	800
Height	H3	mm	1535
Motor Power of Table	kW	mm	0,55
Weight	kg	kg	640

Model : BBT	Symb.	Unit	BBT 500
Capacity		kg	500
Rotating Diameter	Ødmin - ØDmax	mm	Ø80 - Ø710
Roller Diameter	ØB	mm	Ø150
Height	H1 - H2	mm	745 - 890
Length	A	mm	600
Weight		kg	65

❖ All technical specifications are subject to change without prior notice.