

Special Application-1



Special Application-2



General Features ;


- Mini-BTT model Turn Table is widely used industrial, petro-chemical, energy power plant, chemical transmission, ship building, etc.sectors
- Mini-BTT model Turn Table is designed for easily mounting of cylindrical parts for twizzling of by means of worktable provided. Optional special quick mounting-detaching equipment provides easy working advantage.
- Mini-BTT model 1 axis Turn Table Positioner, Regardless of any geometric shape within dimensions of the machine, In favour of being able to position and generating remarkable welding edges to all workpieces are qualified & ideal solutions. Ensures utmostly capability of welding & likewise assembling at 360° degree of any required position .
- Avoids of crane operations that are part handling, rotating of parts, etc. during production, Provides the opportunity of using operator's working power to use more effectively by minimizing time loss and it increases the efficiency of work..
- Mini-BTT-model Turn Table Positioner WorkTable is supplied as standard with Slot grooved. Optionally, If Worktable is requested as T-Grooved Thick Plate also can be manufactured as an option.

Technical Advantages ;

- Out of this standard capacity, Birel Machinery, according to customer standards and requirements, has the opportunity of anufacturing possibility at different capacities.
- Motor with brake and forced fan cooling.
- Allow quick connection of workpieces by using " T " slots on worktable (Optional)
- For any special request or project, Please do not hesitate to contact with us.

❖ All technical specifications are subject to change without prior notice.

FEATURES

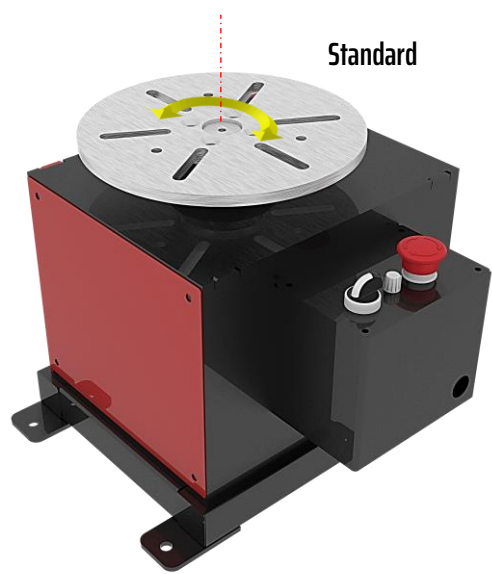

Standard Features

- Round Worktable with Slots.
- Adjustable worktable rotation speed
- Ability of 360 degree worktable rotation.
- 3 m. Power Cable
- Standard Machine Colors:
 - Chassis RAL 7011(Grey)
 - Sheet Covers:RAL 3020(Red)
- Power supply :220V - (2 phase) DC
- One (1) Year Warranty (wearing parts out of warranty)

Optional Control Units

DFPSE

Double Foot Pedal+Stick+
Emergency Stop (3 m)



OHC

Overhead Hangable Control



SFP

Single Foot Pedal




WRC

Wireless Remote Control



❖ All technical specifications are subject to change without prior notice.

TECHNICAL PROPERTIES

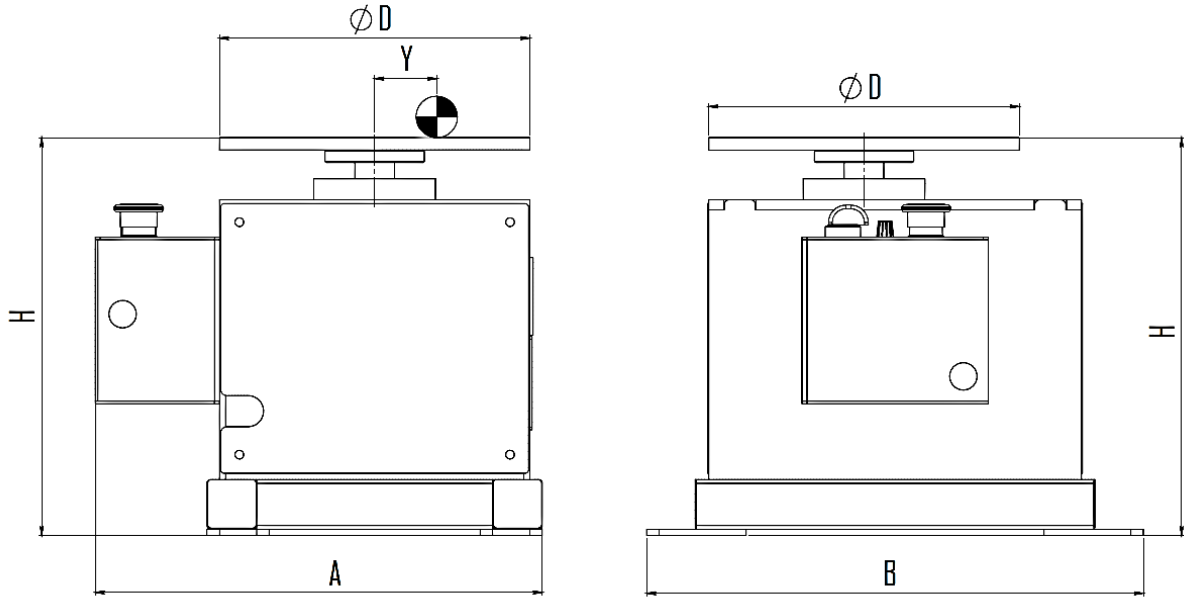

Technical Details :

Model : Mini-BTT	Symb	Unit	Mini-BTT005
Capacity		kg	50
Rotation Speed		rpm	0 - 4
Offset	Y	mm	50
Table Plate Diameter	ØD	mm	250
Width	H	mm	320
Length	A	mm	360
Height	A	mm	360
Power of WorkTable		Watt	100
Weight		kg	30

↪ Out of these standard capacities, Birel Machinery, according to customer requirements, has the manufacturing possibility at different capacities, sizes.

❖ All technical specifications are subject to change without prior notice.